

<p>*46 238</p>	<p>+30</p>	<p>*19 377</p>	<p>30mm</p>	<p>*19 332</p>	<p>32mm</p>
----------------	------------	----------------	-------------	----------------	-------------



DIN EN
806

DIN EN
1717

DIN
1988





bar

max. 10
5
1

°C

max. 70°
60°





*19 332




*19 377




1

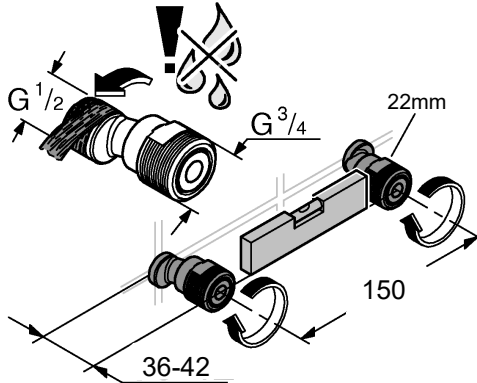


2




3



4











5





6

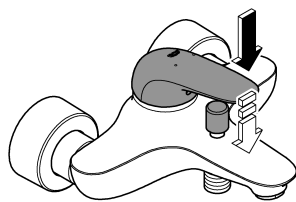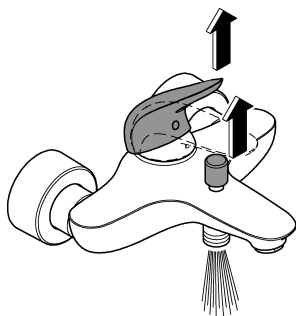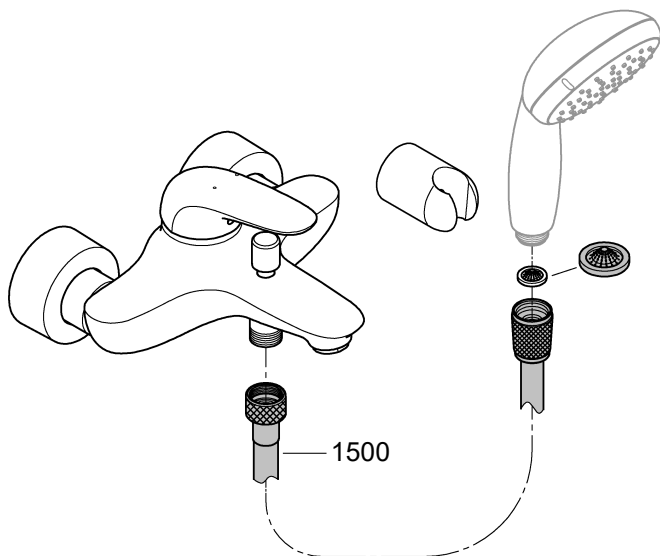

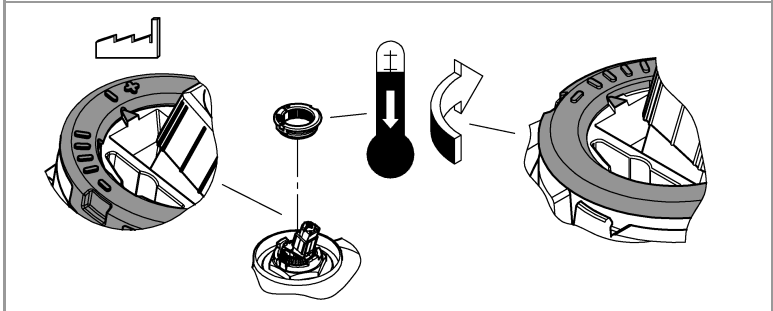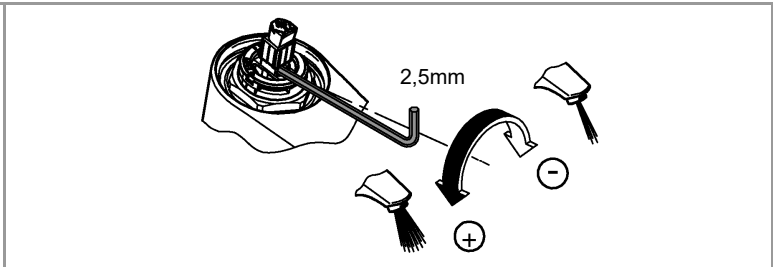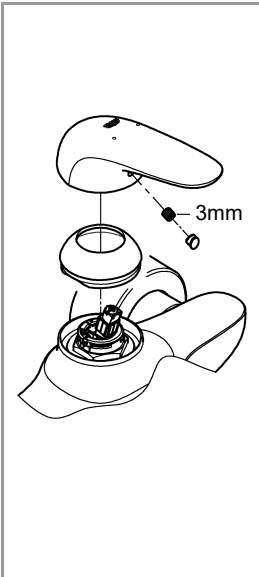

SERVICE

