



Eastbrook

Eastbrook Road, Gloucester GL4 3DB


Step 1: Determine the fixing position for the faucet body.
Make a groove in the wall according to the faucet body.
The dimension of the groove should be 200mm x 49mm.




Step 2: Drill the holes on the wall and connect the cold water inlet and hot water inlet to proper positions.




Step 3: Install the body into the groove.

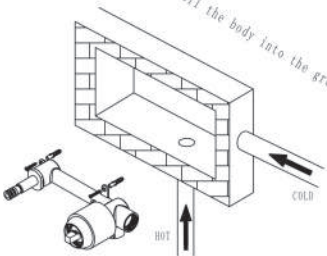

Step 4: Secure the cover plate onto the faucet body with sealant.

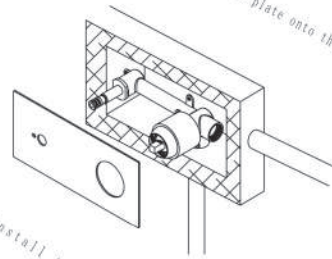

Step 5: Install the spout and handle to the correct positions.

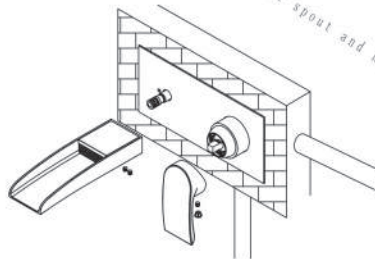

Step 6: Installation completed.

