APE BSM BLK

D1




Features:

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- On-trend matt black finish to make a statement in your bathroom.
- Rub clean handset limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- 10-year parts and 1 year labour guarantee for peace of mind.
 Also available in chrome,
- brushed brass and gun metal grey.
- Co-ordinating Bathroom taps available.

Product Certifications:



Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Long Angled			
Connection Inlet:	3/4" BSP			
Connection Outlet:	Housed M24 Aerator			
Number of Tap Holes:	2			
Valve/Cartridge Type:	3/4" Short Stem Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.3 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	60°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

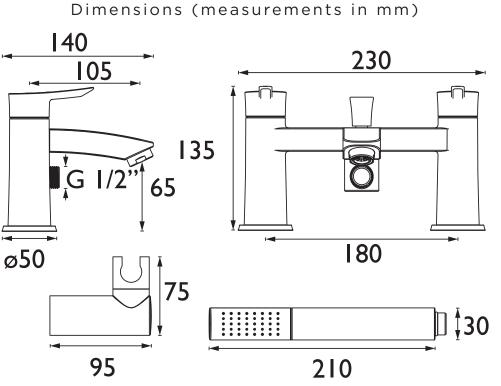

	Flow F	Flow Rates (I/min)							
	System Pressure (bar)	0.3	0.5	1	2	3	5		
	Through Bath Filler (mixed)	12.5	16.4	24	33.3	40.8	52.6		
	Through Handset (mixed)	3.91	5.15	7.62	11.22	14.25	18.96		
TECHNICAL DATA (10 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		B	R	37/				

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

ARANTE

ARANT

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.