COB BSM BLK

COBALT Tap Range Cobalt Bath Shower Mixer Black



Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Includes 1.5m hose, rub-clean anti-limescale handset and wall brack<u>et</u>
- Minimum working pressure of 0.3 bar

Product Certifications:



WRAS Certificate No: 2107137 WRAS Expiry Date: 31/07/2026




For more products, visit our website:



Specification					
Product Type:	Bathroom Tap				
Main Construction Material:	Brass				
Mount Type:	Deck Mounted				
Handle Type:	Lever Handles				
Connection Inlet:	3/4"BSP				
Connection Outlet:	Anti-Splash				
Number of Tap Holes:	2				
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.3 bar				
Maximum Dynamic Pressure (bar):	5.0 bar				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single Flow				
Isolation Included:	No				

Dimensions (measurements in mm)

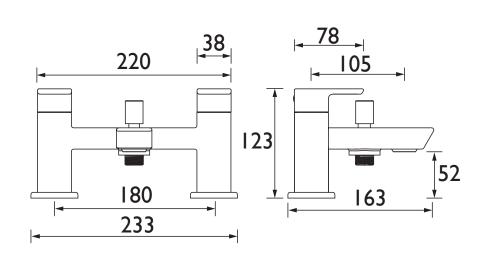

D2

	Flow Rates (I/min)							
化系统标	System Pressure (bar)	0.3	0.5	1	2	3	5	
回的装饰	Through Bath Filler (mixed)	25.8	40.8	57.7	81.6	99.9	129	
	Through Handset (mixed)	4.3	6.8	9.6	13.6	16.7	21.6	
TECHNICAL DATA SHEET	or QUALIA Sevens to Apante *		B	RI 8	572			

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.