



# EGNA



TOP VIEW

### SUPPLIED INSTALLATION ACCESSORIES

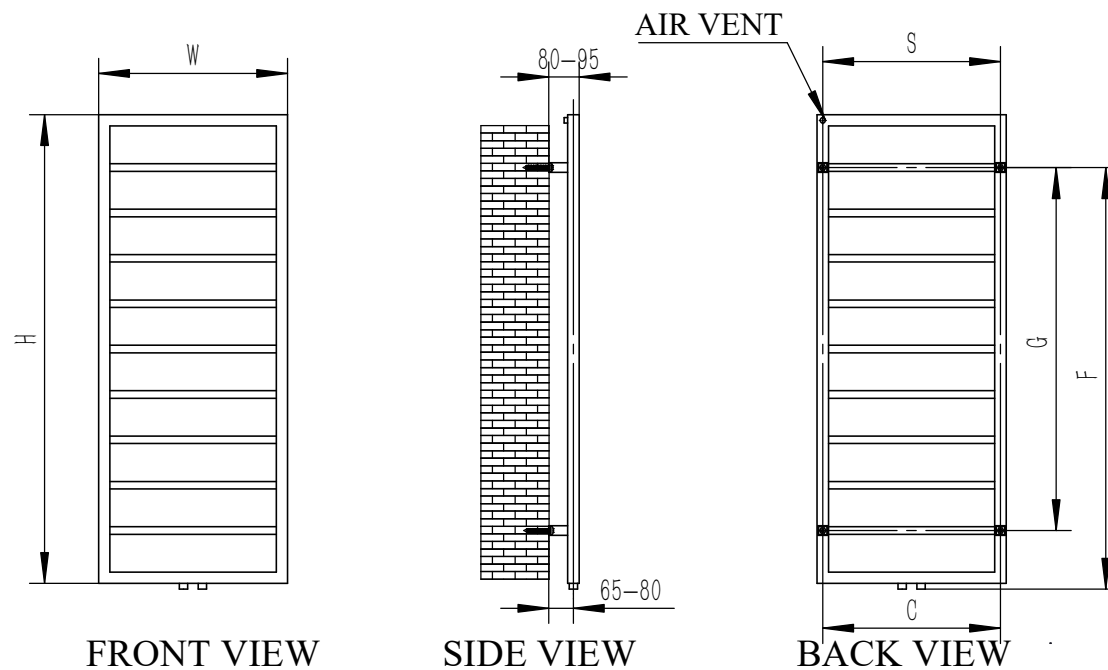

INSERT 4PCS



SCREW 4PCS



BRACKET 4PCS



WALL PLUG 4PCS



GRAB SCREW 4PCS




SCREW 4PCS



ALIEN KEYS 1PCS

- Vertical Mounting
- Optional 304 QUALITY STAINLESS STEEL RADIATOR (RNS-EGN5125P:EGNA RADIATOR)
- POLISHED
- MAX Operational Pressure:10Bar
- Inlet/Outlet:1/2"Female Pipe Thread
- All Dimensions are in mm

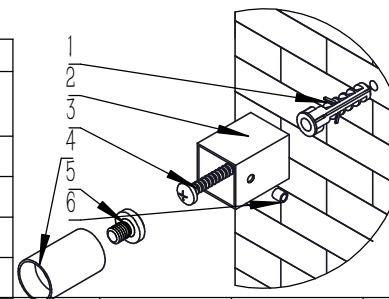

Product Name	Product Cude	Height	Width	Thick Ness	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger To Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight	Thermal Output
		H	W	D	C	S	F	G	-	-	Wat-Btu/hr( $\Delta 50^\circ$ )
		mm	mm	mm	mm	mm	mm	mm	mm	L	kg
EGNA	RNS-EGN5077P	775	500	30	470	470	635	480			
EGNA	RNS-EGN5125P	1255	500	30	470	470	1115	960			
EGNA	RNS-EGN5149P	1495	500	30	470	470	1355	1200			

# REINA