



# FLOX

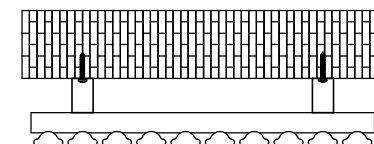

TOP VIEW

## SUPPLIED INSTALLATION ACCESSORIES

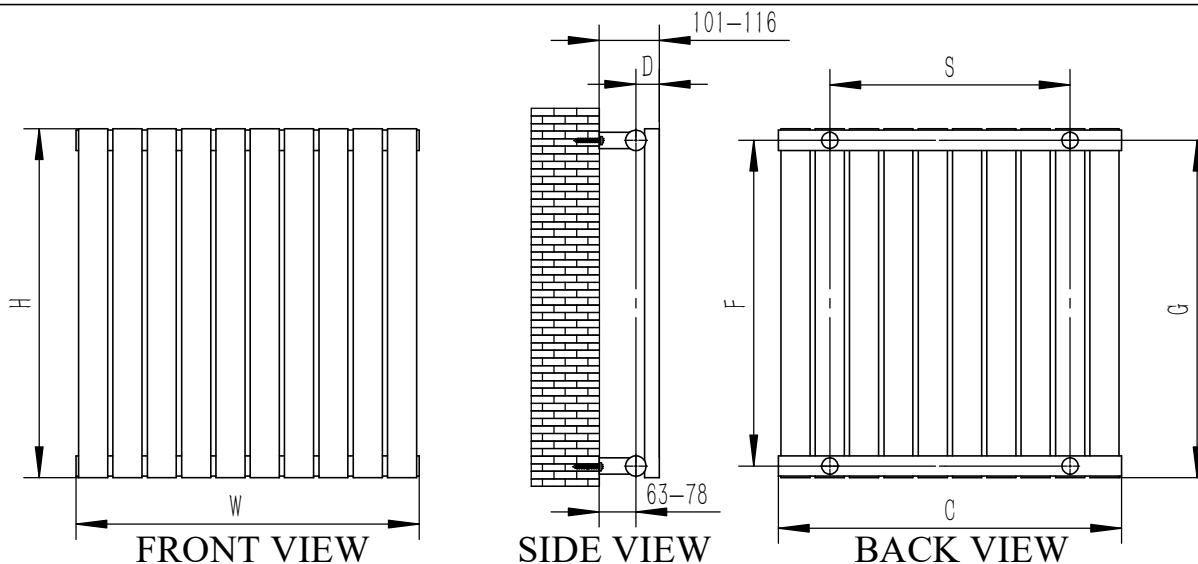

ALLEN KEY 1PCS



SMALL SCREW 4PCS



WALL PLUG 4PCS



POLOSHING CLOTH (Brush) 1PCS



AIR VENT 1PCS



SCREW 4PCS




BUCKET 4PCS



WALL BUCKET 4PCS

- Vertical Mounting
- Optional 304 QUALITY STAINLESS STEEL RADIATOR (FLOX RADIATOR)
- POLISHED
- MAX Operational Pressure: 10Bar
- Inlet/Outlet: 1/2" Female Pipe Thread
- All Dimensions are in mm



Product Name	Product Code	Height	Width	Thickn ess	Plumbing Axes Center to Center	Hanger Axes Horizontal	Hanger To Bottom of the Product	Hanger Axes Vertical	Water Volume	Empty Weight
		H	W	D	C	S	F	G	-	-
		mm	mm	mm	mm	mm	mm	mm	mm	L
	<b>RNS-FTX060041SP</b>	600	413	56	413	236	560	580	3.48	4.7
	<b>RNS-FTX060059SP</b>	600	590	56	590	413	560	580	4.97	6.7
	<b>RNS-FTX060082SP</b>	600	826	56	826	649	560	580	6.96	9.4
	<b>RNS-FTX060100SP</b>	600	1003	56	1003	826	560	580	8.46	11.4
	<b>RNS-FTX060118SP</b>	600	1180	56	1180	1003	560	580	9.95	13.4
	<b>RNS-FTX180029SP</b>	1800	295	56	295	118	1760	1780	6.45	9.1
	<b>RNS-FTX180035SP</b>	1800	354	56	354	177	1760	1780	7.74	10.9
	<b>RNS-FTX180041SP</b>	1800	413	56	413	236	1760	1780	9.03	12.7
	<b>RNS-FTX180047SP</b>	1800	472	56	472	295	1760	1780	10.33	14.5
	<b>RNS-FTX180053SP</b>	1800	531	56	531	354	1760	1780	11.62	16.3

