

# HOU SHCVO C

## HOURGLASS Tap Range Hourglass Recessed Dual Control Shower Valve



### Features:

- 15mm inlet connections
- This shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Fitting depth including plasterboard and tiles is 60mm - 75mm
- Minimum cold water supply temperature is 4°C
- Maximum hot water supply temperature is 80°C


### Product Certifications:



WRAS Cert. Number: 1910908  
WRAS Expiry Date: 31/10/2024




For more products, visit our website:  
<http://www.bristan.com>



### Specification

<b>Product Type:</b>	Mixer Shower
<b>Main Construction Material:</b>	Brass
<b>Connection Inlet:</b>	15mm Compression
<b>Connection Outlet:</b>	15mm Compression
<b>Number of Controls:</b>	2
<b>Flow Control Valve Type:</b>	Thermostatic Cartridge & 3/4" Ceramic Disc Valve
<b>Plumbing System:</b>	Suitable for all plumbing systems
<b>Minimum Dynamic Pressure: (Bar)</b>	0.2 Bar
<b>Maximum Dynamic Pressure: (Bar)</b>	5.0 Bar
<b>Maximum Static Pressure:</b>	10
<b>Maximum Hot Water Temperature: (°C)</b>	80
<b>Pre-set Outlet Temperature:</b>	42°C
<b>Isolation Included:</b>	No
<b>Check Valve Supplied:</b>	Yes
<b>Shower Kit:</b>	Valve Only

### Dimensions (measurements in mm)

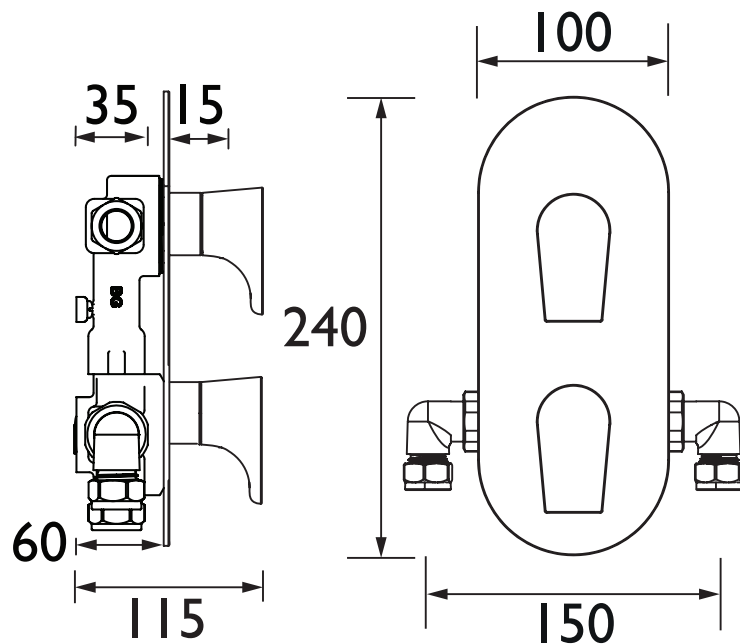

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
HOU SHCVO C	7.5	14.1	21	30.5	37.4	48.2

TECHNICAL  
DATA  
SHEET



**BRISTAN**

D5