

K 1/2 C

Features:

- Crosshead handles for ease of use
- Metal back nuts for added durability
- Supplied with metal handles
- Chrome plated to BS EN 248

Product Certifications:



WRAS Certificate No: 2206901 WRAS Expiry Date: 30/06/2027



For more products, visit our website: http://www.bristan.com


84.6 l/min



 \mathbf{S}

Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Lever			
Connection Inlet:	1/2" BSP			
Connection Outlet:	Open			
Number of Tap Holes:	2			
Valve/Cartridge Type:	1/2" Compression Valve			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Isolation Included:	No			

Dimensions (measurements in mm)

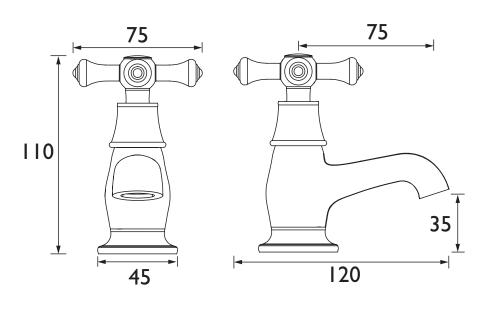

D9

	Flow Rates (I/min)							
化输送器	System Pressure (bar)	0.2	0.5	1	2	3	5	
回認識的	K 1/2 C (Cold)	10.9	17.3	24.4	34.5	42.3	54.6	
	K 1/2 C (Hot)	10.9	17.3	24.4	34.5	42.3	54.6	
TECHNICAL DATA	8 QUATA 5 (10)		B	RK	377			

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

ARANTE

ARANTE

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.