


AQUALISA

MIDAS™ 100 BAR MIXER SHOWER

MD100BAR

WITH ADJUSTABLE HEAD

DIMENSIONAL DRAWINGS

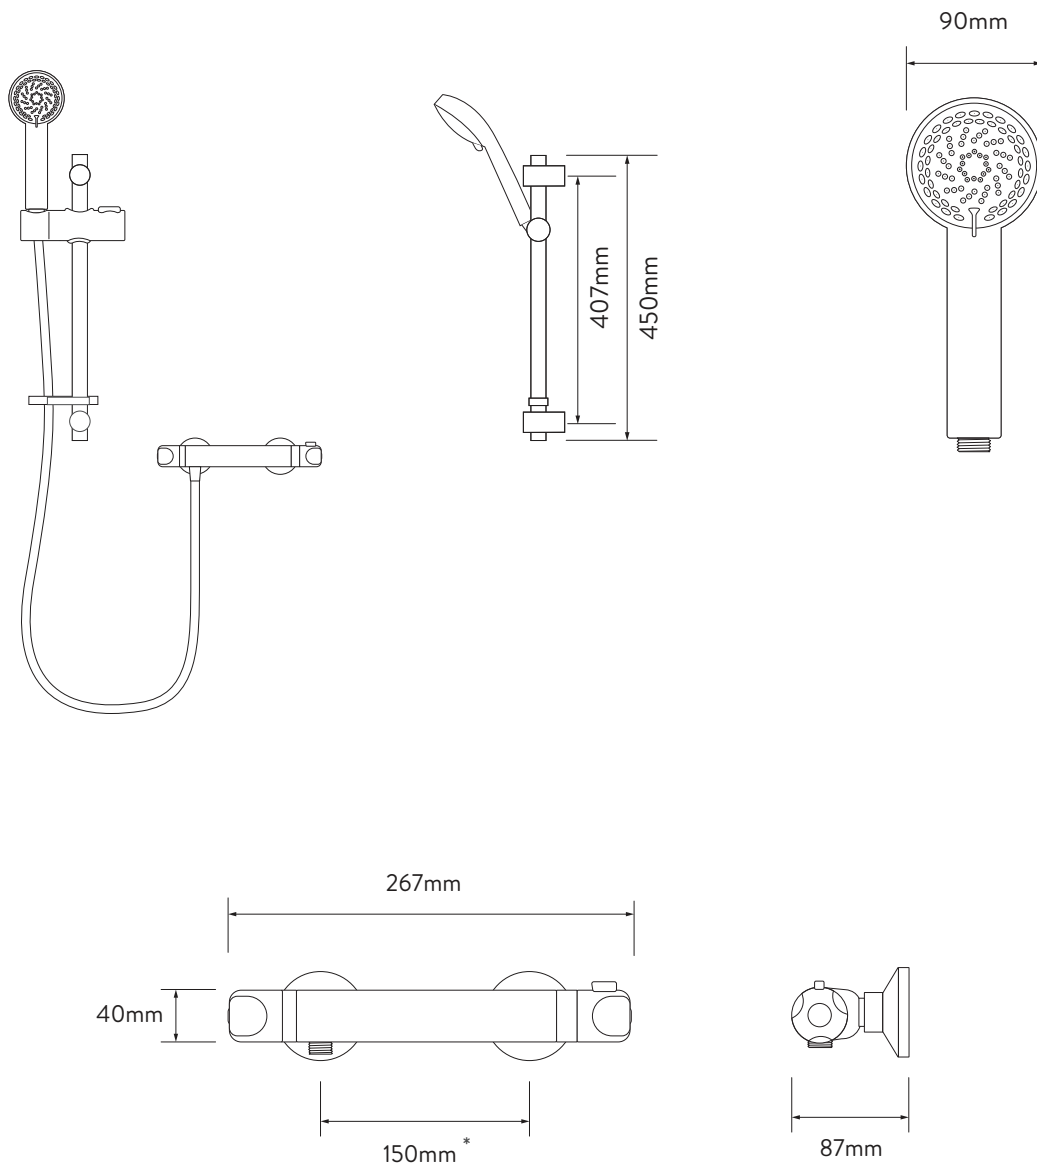

*Pipe centres can be adjusted between 130mm-170mm using supplied elbows

The company reserves the right to alter, change or modify the product or product specifications without prior warning. Please refer to the installation guides for technical information.

Issue 02 Feb 2021

AQUALISA

MIDAS™ 100 BAR MIXER SHOWER



MD100BAR

WITH ADJUSTABLE HEAD

TECHNICAL SPECIFICATIONS

Minimum pressure requirements	0.1 bar
Maximum pressure requirements	10 bar
Inlet fitting connections	3/4" BSP
Inlet supply positions	Hot/left, cold/right (as viewed from front)
Outlet connections	1/2" BSP
Valve inlet centres	150mm - Can be adjusted between 130 - 170 using supplied elbows
Supply temperature	5 - 20°C Cold Supply
	55 - 65°C Hot Supply
Materials	Valve body - Brass
	Valve on/off / flow control knob, valve temperature control knob - ABS
Water system	Gravity
	Boosted gravity
	Combi and balanced High Pressure systems
Features	4 spray patterns
	Adjustable height slider
	Easy clean nozzles
	Flow control
Colour	Chrome
Approvals	WRAS
Guarantee period	Valve - 5 years
	Shower head and kit - 2 years