1901 Tap Range 1901 Bath Taps with Ceramic Disc Valves Chrome

N 3/4 C CD



Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal handles
- Metal back nuts for added durability
- Chrome plated to BS EN 248


Product Certifications:

For more products, visit our website: http://www.bristan.com

DATA

| Specification | | | | |
|-----------------------------------|------------------------------------|--|--|--|
| Product Type: | Bathroom Taps | | | |
| Main Construction Material: | Brass | | | |
| Mount Type: | Deck | | | |
| Handle Type: | Crosshead | | | |
| Connection Inlet: | 3/4" BSP | | | |
| Connection Outlet: | Open | | | |
| Number of Tap Holes: | 2 | | | |
| Valve/Cartridge Type: | 3/4" Ceramic Disc Valve - 1/4 turn | | | |
| Plumbing System Requirements: | Suitable for all plumbing systems | | | |
| Minimum Dynamic Pressure (bar): | 0.2 bar | | | |
| Maximum Dynamic Pressure (bar): | 5 bar | | | |
| Maximum Hot Water Temperature °C: | 65°C | | | |
| Maximum Static Pressure (bar): | 10 bar | | | |
| Isolation Included: | No | | | |

Dimensions (measurements in mm)

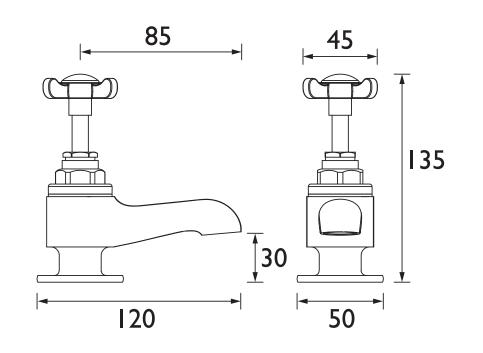

| | Flow Rates (I/min) | | | | | | | | |
|-----------|-----------------------|------|------|------|------|------|-------|--|--|
| | System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 | | |
| | N 3/4 C CD (Cold) | 19.5 | 29.3 | 46.8 | 66.2 | 81.1 | 104.7 | | |
| | N 3/4 C CD (Hot) | 19.5 | 29.3 | 46.8 | 66.2 | 81.1 | 104.7 | | |
| | | | | | | | | | |
| TECHNICAL | | | | | | | | | |



Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.