
ROPER RHODES®

Stand Pipes

Installation & aftercare instructions

Please retain for future reference

T262102 / T262202

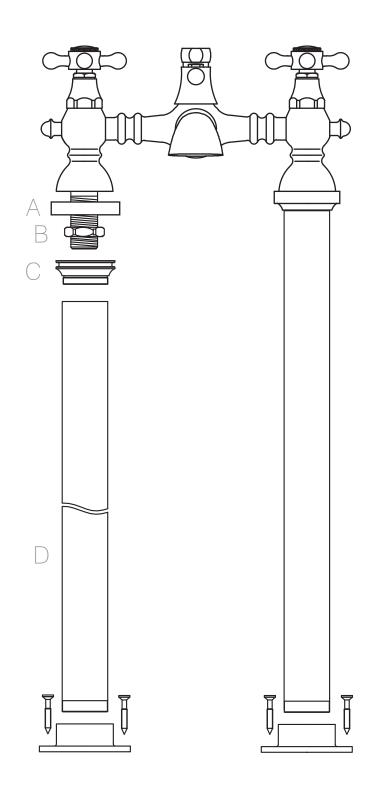

Customer Service

Tel: 01225 303 900 Fax: 01225 448 877 Email: sales@roperrhodes.co.uk www.roperrhodes.co.uk

Roper Rhodes Limited Brassmill Lane Trading Estate, Bath, BA1 3JF

Installation Procedure:

Before installing the bath filler or bath / shower mixer, ensure the desired installation position is suitable and allows access for the pipework to be connected to the bath / shower mixer through the stand pipes. Turn off the water supply prior to installation. Bath filler shown is for illustrative purposes and not supplied.

- 1) Remove the top plate (A), and fixing nut (B) from the top of the stand pipes using the grub screw on the top plate. Leave the threaded collar (C) in the top of the stand pipe.
- 2) Secure the base plate of the stand pipes (D) to the floor, making a suitably sized hole in the floor for pipework to pass through to connect the bath / shower mixer to. A flexible 3/4" hose connection is recommended for ease of installation.

Note: The fixings supplied are intended for use on floors - for other applications consult a specialist for suitable fixings.

If installing stand pipes with a shower handset holder, position holder on stand pipe legs before proceding to step 3.

- 3) Position the top plate (A) onto the threaded legs of the bath/shower mixer. Secure in place with the fixing nut.
- 4) Using a 3/4" connection on the threaded legs of the bath / shower mixer, pass the supply pipework through the stand pipes and through the hole in the floor to connect to the water supply pipework under the floorboards.
- 5) Offer the bath shower mixer and top plate onto the collar and secure in place with the grub screw.
- 6) Turn the water supply back on and run water through the system for one minute to flush the system and check for any leaks.

Aftercare Instructions

Whilst this item has a high quality durable finish, it should nevertheless be treated with care. Surfaces should be cleaned using only a soft damp cloth and clean water & dried using a soft cotton cloth. Bath cleaning products, even non-scratch ones could damage the finished surface.

10 Year Guarantee

We have complete confidence in this Roper Rhodes product and as such it is offered with a 10-year guarantee against defects in manufacture. This product must be fitted by a competent installer. If in doubt seek advice from a qualified professional. The guarantee requires that this product be used in the manner for which it was intended and that it is installed & maintained in accordance with the fitting instructions and local water bylaws. The guarantee covers products in domestic use only. The guarantee is invalidated should the product be damaged by water borne debris. Make sure that supply pipes are clear of any debris prior to installation, this is particularly important on new plumbing installations. In the unlikely event that this product should fail during the guarantee period we will either replace the faulty part or the complete unit as appropriate. Tap valves are subject to a 1-year guarantee. This guarantee covers damage against reasonable wear and tear in use only. It does not cover damage incurred during installation, misuse or inappropriate maintenance. We recommend that the valve is regularly cleaned in hard water areas to prevent lime scale build-up. Replacement valves are available to purchase by contacting the Roper Rhodes Customer Service team. Failure to follow the terms outlined above will invalidate this guarantee. Proof of purchase will be required to validate any guarantee claims.