## SAF ES BAS BLK

## SAFFRON Tap Range Saffron Eco Start Basin Mixer with Clicker Waste Black



F	ea	tu	res:

- Eco Start technology saves energy by having cold water as the default central start position of the tap handle. Hot water is only activated when the tap lever is moved from the central position, so your boiler is not unnecessarily fired up.
- This tap has a flow regulator, which limits the flow of water to 5 litres per minute, reducing the amount of water you use.
- Long life ceramic cartridge for added durability and smooth control.
- Everything you need in the box including flexible tails and clicker waste so nothing to buy separately.
- On-trend matt black finish to make a statement in your bathroom.


Product	Certifications:
---------	-----------------



WRAS Certificate No: 2307905 WRAS Expiry Date: 31/07/2028

Specification							
Product Type:	Bathroom Taps						
Main Construction Material:	Brass						
Mount Type:	Deck						
Handle Type:	Lever						
Connection Inlet:	1/2" BSP Flexible Tails						
Connection Outlet:	M24 5lpm Coin-Slot Aerator						
Number of Tap Holes:	1						
Valve/Cartridge Type:	28mm Eco-Start Cartridge						
Plumbing System Requirements:	Suitable for all plumbing systems						
Minimum Dynamic Pressure (bar):	0.5 bar						
Maximum Dynamic Pressure (bar):	5 bar						
Maximum Hot Water Temperature °C:	60°C						
Maximum Static Pressure (bar):	10 bar						
Flow Type:	Single						
Isolation Included:	No						

## Dimensions (measurements in mm)

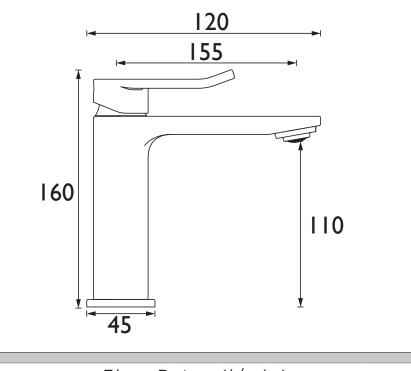

	Flow Rates (l/min)						
Water Label	System Pressure (bar)	0.5	0.5	1	2	3	5
	SAF ES BAS BLK (mixed)	2.6	2.6	3.7	4.6	4.7	5
TECHNICAL DATA SHEET	REARS ANTER		B	RIS	ST/	AN	D2

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

\* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.