SAF ES TLBAS BB

SAFFRON Tap Range Saffron Eco start Tall Basin Mixer with Clicker Waste Brushed Brass




Features:

- Eco Start technology saves energy by having cold water as the default central start position of the tap handle. Hot water is only activated when the tap lever is moved from the central position, so your boiler is not unnecessarily fired up.
- This tap has a flow regulator, which limits the flow of water to 5 litres per minute, reducing the amount of water you use.
- Long life ceramic cartridge for added durability and smooth control.
- Everything you need in the box including flexible tails and clicker waste so nothing to buy separately.
- On-trend brushed brass finish to make a statement in your bathroom.

Product Certifications:	
APPROVED PRODUCT	
WRAS Certificate No: 2307906 WRAS Expiry Date: 31/07/2028	
Wifed Water Label	
TECHNICAL	
DATA	

Specification						
Product Type:	Bathroom Taps					
Main Construction Material:	Brass					
Mount Type:	Deck					
Handle Type:	Lever					
Connection Inlet:	1/2" BSP Flexible Tails					
Connection Outlet:	M24 5lpm Coin-Slot Aerator					
Number of Tap Holes:	1					
Valve/Cartridge Type:	28mm Eco-Start Cartridge					
Plumbing System Requirements:	Suitable for all plumbing systems					
Minimum Dynamic Pressure (bar):	0.5 bar					
Maximum Dynamic Pressure (bar):	5 bar					
Maximum Hot Water Temperature °C:	60°C					
Maximum Static Pressure (bar):	10 bar					
Flow Type:	Single					
Isolation Included:	No					

Dimensions (measurements in mm)

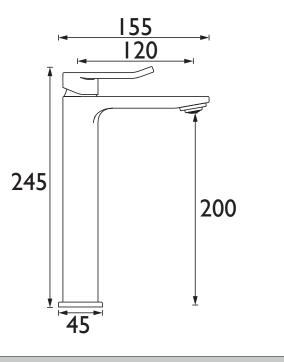

	Flow Rates (l/min)						
Winfied Water Label	System Pressure (bar)	0.5	0.5	1	2	3	5
	SAF ES TLBAS BB (mixed)	2.5	2.5	3.5	4.5	4.8	5.1
TECHNICAL DATA SHEET	PERFS + PERFS +		В	RIS	ST/	AN	D2

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.