

TFS 1 C

COMMERCIAL Shower Range Timed Flow Temperature Adjustable Manual Shower Valve




Specification	
Style:	Contemporary
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Timed Flow Manual Shower Valve
Shower Head Type:	Anti-Vandal Fixed Head
Valve/Cartridge Type:	Temperature Control Cartridge
Maximum Hot Water Supply Temperature °C:	65
Dynamic Pressure Range: (bar)	Min 1.0 Bar, Max 5.0 Bar
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	High Pressure Systems Only
Flow Type:	Single Flow
Flow Rate (Open Outlet)	18.8
Connection Inlet:	15mm compression
Connection Outlet:	22mm compression
Isolation Valve Included:	No
Check Valve Included:	Yes

Features:

- Push button timed flow giving 30 secs (+/-5)
- Supplied with adjustable riser and vandal resistant shower head
- Adjustable max temp
- Vandal resistant

Product Certifications:



BREEAM Compliant



Also available from the
COMMERCIAL Shower Range is:



Dimensions (measurements in mm)

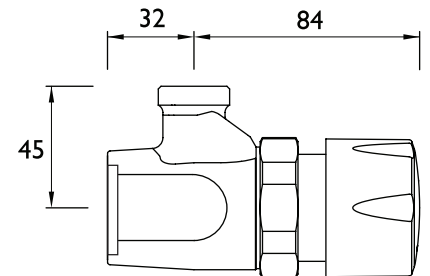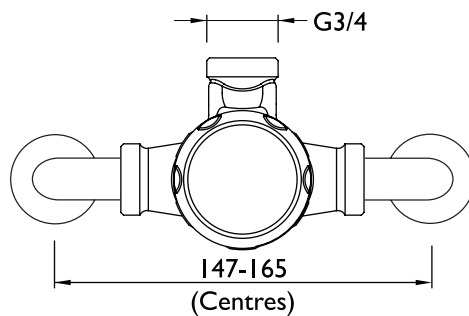

Flow Rates (l/min)

System Pressure (bar)	1	2	3	4	5
With Flow Regulators	5.6	6.1	6.8	7	7.1
Without Flow Regulators	10.9	15.4	18.8	21.7	24.3

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS

D3