VT2 BASNW C

VANTAGE Tap Range Vantage 2 Basin Mixer without Waste Chrome



Specification					
Product Type:	Bathroom Taps				
Main Construction Material:	Brass				
Mount Type:	Deck				
Handle Type:	Lever				
Connection Inlet:	M10 x 350mm 1/2" BSP Flexible Tails				
Connection Outlet:	M24 Aerator				
Number of Tap Holes:	1				
Valve/Cartridge Type:	35mm Stepped Cartridge				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.4 bar				
Maximum Dynamic Pressure (bar):	5.0 bar				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single				
Isolation Included:	No				

Features:

- Long life ceramic cartridge for added durability and ease of use
- Metal fixing nut for added durability
- Flexible tails included
- Minimum working pressure of 0.4 bar

Product Certifications:



WRAS Certificate No: 2003906 WRAS Expiry Date: 31/03/2025






For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

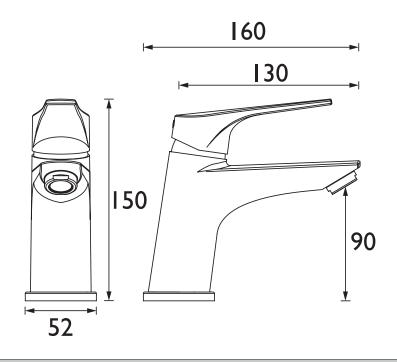

Flow Rates (I/min)								
System Pressure (bar)	0.4	0.5	1	2	3	5		
VT2 BASNW C (mixed)	5.3	5.9	8.4	11.8	14.5	18.7		

TECHNICAL DATA SHEET



