BRISTAN

Square Clicker Basin Waste Unslotted

Installation Instructions & User Guide



BRISTAN

5. Bristan Guarantee

Contents	Page
1. Introduction	O1
2. Safety Note	O1
3. Specification	O1
4. Installations	
Clicker waste(slotted)	02
Clicker waste (unslotted)	03

04



1. Introduction

Thank you for choosing Bristan, the UK's leading taps and showers expert. We have designed this product with your enjoyment in mind. To ensure that it works to its full potential, it needs to be fitted correctly. These fitting instructions have been created to give you all of the information you need and, if you need any further help, please do not hesitate to give us a call on 0844 701 6273.

2. Safety Note


Please read these instruction thoroughly and retain for future use. All products manufactured and supplied by Bristan are safe provided they are installed correctly, used correctly add receive regular maintenance in accordance with these instructions.

3. Specification

Designed to comply with BS EN 274-1:2002 Waste fittings for sanitary appliances.



- 4. installation W BASIN06 C(slotted)
- 1. Identify all components are present prior to instillation.
- 2.Unscrew the backnut (4) and remove one of the rubber washers (3). Fit the waste body from above the basin with the first washer. Locate the bottom of the waste.
- 3. Secure the waste with backnut (4) and second washer (3). Use a pure silicon sealant where necessary.
- 4.In order to fill the basin, the 'clicker' mechanism (1) of the waste needs to be pressed down. To release water, press button again.
- 5. Check all joints and connections for leaks.

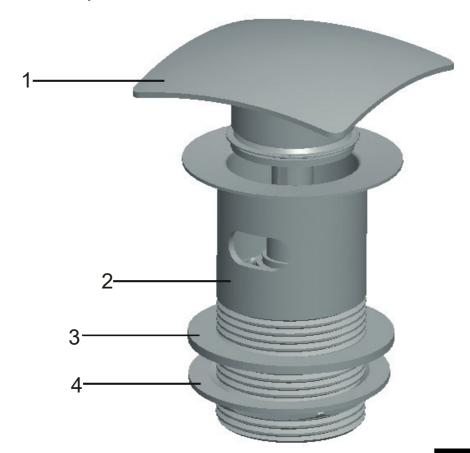


Parts contents list	
1. Clicker mechanism	x 1
2. Waste body/ flange	x 1
3. Washers	x2
4.Backnut	x1



installation continued - W BASIN07 C(unslotted)

- 1. Identify all components are present prior to instillation.
- 2.Unscrew the backnut (4) and remove one of the rubber washers (3). Fit the waste body from above the basin with the first washer. Locate the bottom of the waste.
- 3. Secure waste with backnut (4) and second washer (3). Use a pure silicon sealant where necessary.
- 4.In order to fill the basin, the 'clicker' mechanism (1) of the waste needs to be pressed down. To release water, press button again.
- 5. Check all joints and connections for leaks.

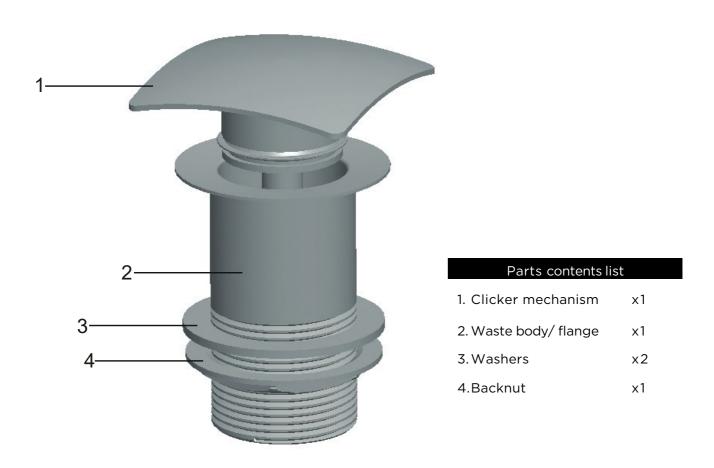

BRISTAN

This booklet covers all product codes:

W BASIN07 C

W BASIN07 G

W BASIN06 C

W BASINO6 G

Helpline 0330 026 6273

Bristan Group Limited

Birch Coppice Business Park, Dordon, Tamworth, Staffordshire B78 1SG

A Masco Company

Website:

www.bristan.com

Telephone: 0330 026 6273 Email: enquire@bristan.com

At Bristan, we want to make things as easy as possible for our customers.

That's why we offer solid guarantees on all our products, effective from the date of purchase, to give you peace of mind.

To start your free guarantee, simply scan the QR code and Register your product.

Alternatively, visit <u>www.bristan.com/register</u> to register your product via a computer.

For full guarantee terms and conditions visit, <u>www.bristan.com/guarantees</u>



We Know & We Care-