

Fixing Instructions


Jan 2013

Version 1.0

Axis

Art No. 77417000

NB. This product must be installed with a minimum distance of 150mm between the infra-red sensor switch and any adjacent wall or object to ensure correct operation of the sensor.

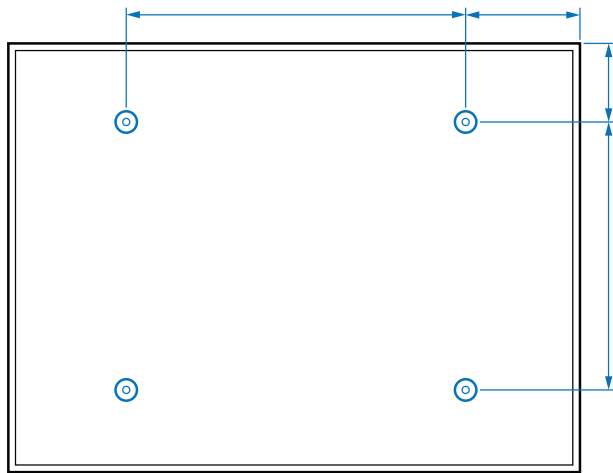


REAR VIEW
■ mounting points



This product is suitable for installation in zones: **2** **02**

All installations must comply with guidelines which are based on a zonal concept. The diagram above illustrates this concept and must be followed to ensure the safe installation of bathroom lighting. These regulations apply to domestic installations only. Installations must be made in accordance with the current IEE wiring regulations and relevant building regulations. HiB recommends that all electrical bathroom products should only be fitted by a suitably qualified, Part P registered electrician.

Wiring Diagram

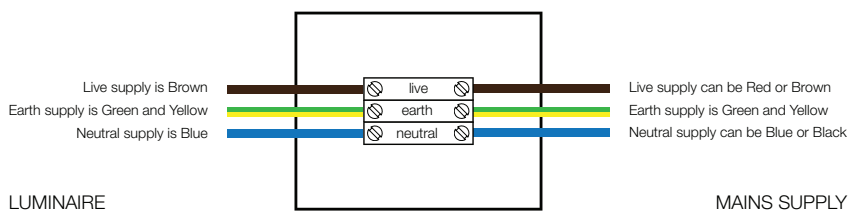

WEEE compliance - must not be mixed with general household waste


Fixing Instructions:

Thank you for purchasing this HiB product. Please read through these instructions carefully and refer back to them during installation to ensure that your product is fitted safely and that it retains its high quality finish.

Please retain this leaflet for future reference

- 1) Position the mirror in a suitable location (according to the zonal diagram below-left), ensuring that the domestic electrical mains supply is within reach of the electrical entry point of the product.
- 2) Detach mirror by removing screws on the exterior of the frame.
- 3) Open the mirror casing and disconnect the heat pad cable and the LED cable. Place the mirror frame to a flat wall surface.
- 4) Carefully mark the position of the mirror using a soft pencil.
- 5) Remove the mirror and mark the mounting points according to the diagram on the left. **Please ensure that all marked mounting points accurately match up with the fixing points on the mirror.**
- 6) Before drilling, ensure there are no hidden cables or pipes behind the mounting points. Using a masonry drill, drill holes in the marked positions to a suitable depth. If drilling through tile, use a ceramic drill bit.
- 7) Insert wall plugs level with the surface of the wall. If fitting to a tiled surface, wall plugs should be inserted below the tile surface to avoid cracking. *NB. For plasterboard walls, specialist fixings should be purchased, available from any DIY or hardware store.*
- 8) **Ensure the domestic electrical mains supply to which the mirror is being connected is turned off.** Feed the domestic mains supply wire through the grommet on the mirror frame.
- 9) Hold the frame in position, and screw through the holes in the frame into the wall plugs.
- 10) Connect the domestic mains supply to the terminal box according to the wiring diagram below-left.
- 11) Ensure the heat pad cable and LED cable are reconnected. Reattach the mirror to the frame.

Bulb Replacement:

-  In the unlikely event that the LED light strip should fail please contact HiB customer services for a replacement part at the address shown below.

Operating Instructions:

- To turn illumination on or off, operate the sensor switch located at the bottom of the mirror.
- Heated Pad is only on when mirror is illuminated.
- To turn shaver socket on or off, operate the rocker switch next to the socket. Shaver socket is suitable for recharging toothbrushes. *NB. On first use of the shaver socket, inserting the shaver plug may prove to be stiff. Reasonable force may be required to fully insert the plug. After a few uses, stiffness will ease and the socket will function as normal.*

Care Instructions:

- Do not use abrasives or solvents when cleaning this product.
- Wipe off all water spillages as soon as possible using a soft, damp cloth.

HiB

HiB Ltd, Castle House, 21-23 Station Road, New Barnet, Herts, EN5 1PH
t. 020 8441 0352 f. 020 8441 0219 e. sales@hib.co.uk w. www.hib.co.uk

©HiB Copyright: No part of this document may be reprinted or duplicated without HiB consent. All sizes and measurements are approximate, but we do try and make sure they are as accurate as possible. In the interest of continuous product development, HiB reserves the right to alter specifications as necessary. E & OE.