HOU ES BAS BLK

HOURGLASS Tap Range Hourglass Eco Start Basin Mixer Black




Specification		
Product Type:	Bathroom Taps	
Main Construction Material:	Brass	
Mount Type:	Deck	
Handle Type:	Lever	
Connection Inlet:	1/2" BSP Flexible Tails	
Connection Outlet:	M24 5lpm Flow Limiter	
Number of Tap Holes:	1	
Valve/Cartridge Type:	35mm Eco-Start Cartridge	
Plumbing System Requirements:	Suitable for all plumbing systems	
Minimum Dynamic Pressure (bar):	0.5 bar	
Maximum Dynamic Pressure (bar):	5 bar	
Maximum Hot Water Temperature °C:	65°C	
Maximum Static Pressure (bar):	10 bar	
Flow Type:	Single	
Isolation Included:	No	


Features:


- Eco Start technology saves energy by having cold water as the default central start position of the tap handle. Hot water is only activated when the tap lever is moved from the central position, so your boiler is not unnecessarily fired up.
- This tap has a flow regulator, which limits the flow of water to 5 litres per minute, reducing the amount of water you use.
- Everything you need in the box including flexible tails and clicker/pop-up waste so nothing to buy separately.
- Long life ceramic cartridge for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.

Product Certifications:			
Water Label			
For more products, visit our web http://www.bristan.com	site:		

Dimensions (measurements in mm)





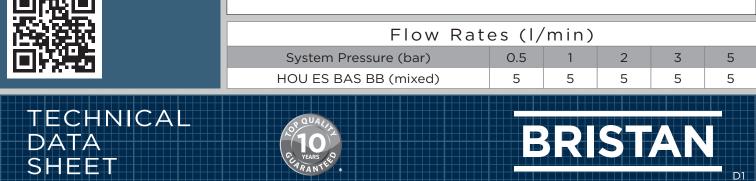

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.