
## ROPER RHODES®

## **Technical Data Sheet**

PRESENCE - PR50ALU, PR65ALU & PR100ALU

#### PR50ALU

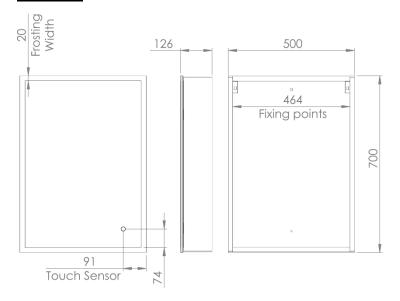

#### **Box Contents**

Presence Cabinet | 2 glass shelves | 2x Wall hanging brackets | 4x wall plugs | 4x screws | Instructions booklet

#### **Materials**

Carcass: Extruded Aluminium Door: Double sided mirror Glass: 3mm PVC Backed

Carcass end caps: Painted plastic

\*Dimensions are subject to change, customers are advised to measure actual product before commencing installation.

\*\*Fixing point dimensions are for guidance only/the positions of wall fixing must be checked when product is received.


FAQ's:	Units	PR50ALU	PR65ALU	PR100ALU
Internal dimensions (L x W x D)	mm	658 x 464 x 100	658 x 614 x 100	658 x 964 x 100
Shelf dimensions (L x W x D)	mm	456 x 95 x 8	606 x 95 x 8	956 x 100 x 8
Max shelf spacing	mm	Customer can adjust to suit any spacing requirements		
Distance between door hinges	mm	450		
Individual door dimensions (L x W x D)	mm	700 x 500 x 11	700 x 324 x 11	700 x 500 x 11
Max door opening angle	0	110		
Max depth with door open	mm	626	450	626
Hanging bracket centres	mm	464	614	964
What is the thickness of the mirror glass?	mm	3		
Is the cabinet IP44 rated?	-	Yes – suitable for use in bathroom zone 2		
What size fuse should I use?	-	Seek the advice of an electrician		
What is the total power consumption?	W	36.5	68	73
Does the cabinet have an energy rating?	-	Yes – It has an energy rating of: A		
What is the colour of the light and the Kelvin rating?	K	2700 - 6500		
What is the wattage of the lights?	W	21.5	38	43
Where is the touch sensor/rocker switch located?	-	Front bottom riç	ght Fron	nt left door – bottom right
Can the LED lighting be replaced?	-	No		
Can the IR sensor be replaced?	-	No		
What is the output of the demister pad?	W	15	30	30
What are the dimensions of the demister pad? (L x W)	mm	200 x 300	150 x 400	200 x 300
How do I turn on the demister pad?	-	The demister pad will turn on when the LEDs are turned on.		
Are illuminated cabinets supplied with mains cable?	-	All illuminated cabinets are supplied with a removeable 500mm mains cable. There is ample storage for excess cable in the back of the unit.		


#### 10 Year Guarantee

We have complete confidence in this Roper Rhodes bathroom cabinet and as such it is offered with a 10-year guarantee against defects in manufacture. The electronics are covered by our 2-year guarantee. In the unlikely event that this product should fail during the guarantee period we will either replace the faulty part or the complete unit as appropriate.

# ROPER RHODES®

## PR65ALU

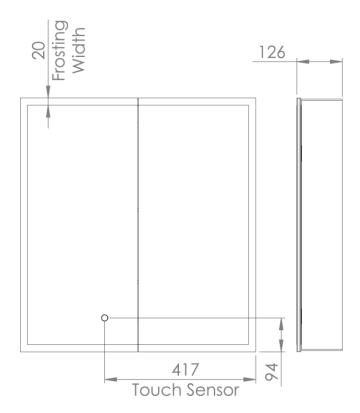

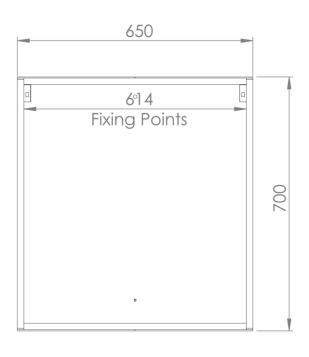

## PR100ALU

