### HOURGLASS BB SHWR PK

### HOURGLASS Shower Range Hourglass Brushed Brass Shower Pack




#### Features:

- This classically styled shower pack contains our Hourglass shower valve with integral two outlet diverter. It has a 200mm round slimline fixed head with shower arm; a multi function handset and hose with integral handset holder and wall outlet.
- The shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Dual control flow and temperature are controlled separately
- Cartridge can be accessed from the front, Requires rear access to service filters
- 15mm inlet connections

# Product Certifications:

Specification				
Finish/Colour:	Brushed Brass			
Main Construction Material:	Brass; ABS			
No of Controls:	2			
Shower Type:	Dual Control			
Shower Head Type:	Both			
Shower Kit:	Fixed Head			
Valve/Cartridge Type:	40mm Single Lever Cartridge			
Maximum Hot Water Supply Temperature <sup>o</sup> C:	65			
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced			
Minimum Dynamic Pressure (bar):	0.2			
Maximum Dynamic Pressure (bar):	5			
Maximum Static Pressure (bar):	10			
Connection Inlet:	15mm Compression			
Connection Outlet:	G 1/2"			
Isolation Valve Included:	No			
Check Valve Included:	Yes			

### Dimensions (measurements in mm)

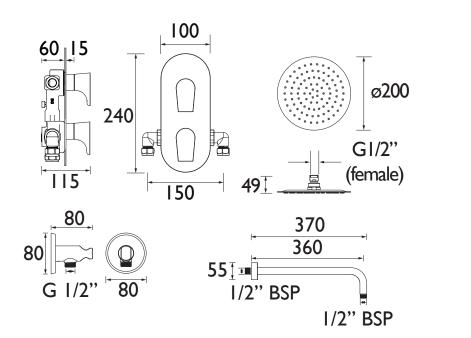

	Flow Rates (l/min)							
	System Pressure (bar)	0.2	0.5	1	2	3	5	
	Through Handset (mixed)	3.1	4.9	6.9	8.3	9.5	10.6	
	Through Fixed Head (mixed)	3.3	5.2	7.3	8.8	9.8	10.9	





## BRISTAN

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com. \* - Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.