APL ES BAS BB

APPEAL Tap Range Appeal Eco Start Basin Mixer with Clicker Waste Brushed Brass



L
L
L
l
Н

Fea			
$- \circ$		\mathbf{I}	· •
	-	4 I C	-

- Eco Start technology saves energy by having cold water as the default central start position of the tap handle. Hot water is only activated when the tap lever is moved from the central position, so your boiler is not unnecessarily fired up.
- This tap has a flow regulator, which limits the flow of water to 5 litres per minute, reducing the amount of water you use.
- Long life ceramic cartridge for added durability and smooth
- Everything you need in the box including flexible tails and clicker waste so nothing to buy separately.
- On-trend brushed brass finish to make a statement in your
- 10-year parts and 1 year labour guarantee for peace of mind.
- Also available in chrome and
- Co-ordinating Bathroom taps available.


Product Certifications:

Water Label



Specification						
Product Type:	Bathroom Taps					
Main Construction Material:	Brass					
Mount Type:	Deck					
Handle Type:	Paddle Lever					
Connection Inlet:	1/2" BSP Flexible Tails					
Connection Outlet:	Housed 5lpm M24 Aerator					
Number of Tap Holes:	1					
Valve/Cartridge Type:	35mm Cold Start Upper Seal Cartridge					
Plumbing System Requirements:	Suitable for all plumbing systems					
Minimum Dynamic Pressure (bar):	0.5 bar					
Maximum Dynamic Pressure (bar):	5 bar					
Maximum Hot Water Temperature °C:	60°C					
Maximum Static Pressure (bar):	10 bar					
Flow Type:	Single					
Isolation Included:	No					

Dimensions (measurements in mm)

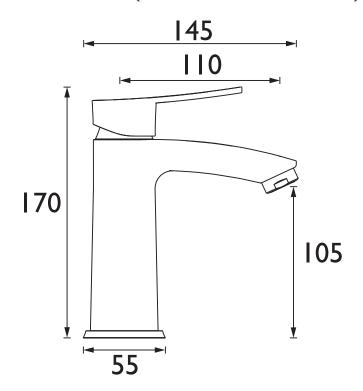

Flow Rates (I/min)								
System Pressure (bar)	0.5	1	2	3	5			
APL ES BAS BB (mixed)	2.8	4.1	5	4.7	4.7			

TECHNICAL





Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.