## JU BSM C

# JUTE Tap Range Jute Bath Shower Mixer Chrome



Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Lever			
Connection Inlet:	3/4" BSP			
Connection Outlet:	M28 Flow Straightener			
Number of Tap Holes:	2			
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems, ideally balanced			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			

Specification

10 bar

Single

Dimensions (measurements in mm)


No

Bathroom Tap

#### Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Metal handles
- Chrome plated to BS EN 248

#### **Product Certifications:**

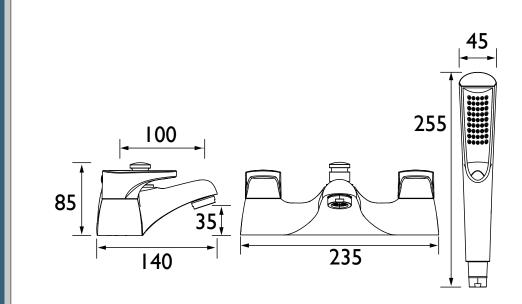



**16.5 l/min** 

For more products, visit our website: http://www.bristan.com



Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
Through Bath Filler (mixed)	21.9	34.7	49.1	69.4	85	109.7		
Through Handset (mixed)	4.3	6.7	9.5	13.5	16.5	21.3		

### TECHNICAL DATA SHEET



**Product Type:** 

Maximum Static Pressure (bar):

Flow Type:

**Isolation Included:** 

