ORTA Tap Range Orta Basin Taps Chrome

OR 1/2 C



Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Easy to use metal handles
- Chrome plated to BS EN 248

Product Certifications:



WRAS Cert. Number: 2104903 WRAS Expiry Date: 30/04/2026




For more products, visit our website: http://www.bristan.com



Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck Mounted			
Handle Type:	Lever Handles			
Connection Inlet:	1/2" BSP			
Connection Outlet:	M16 Aerator			
Number of Tap Holes:	2			
Valve/Cartridge Type:	1/2" Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Isolation Included:	No			

Dimensions (measurements in mm)

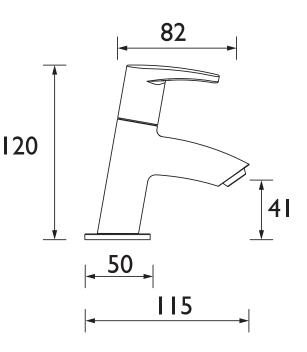

	Flow Rates (I/min)							
	System Pressure (bar)	0.2	0.5	1	2	3	5	
	OR 1/2 C (Cold)	9.1	14.4	20.4	28.8	35.3	45.6	
	OR 1/2 C (Hot)	9	14.2	20	28.3	34.7	44.8	
TECHNICAL DATA SHEET	OP QUALAZ SEARS THE OP QUALAZ TO PEARS THE OP THE SEARCH OF THE SEARCH OF THE OP THE O		B	RIS	572		D6	

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.