OR BSM C

ORTA Tap Range Orta Bath Shower Mixer Chrome



Specification					
Product Type:	Bathroom Taps				
Main Construction Material:	Brass				
Mount Type:	Deck				
Handle Type:	Square				
Connection Inlet:	3/4" BSP				
Connection Outlet:	G 1/2"				
Number of Tap Holes:	2				
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn				
Plumbing System Requirements:	Suitable for all plumbing systems, ideally balanced				
Minimum Dynamic Pressure (bar):	0.2 bar				
Maximum Dynamic Pressure (bar):	5 bar				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single				
Isolation Included:	No				

Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Includes 1.75m hose, rub-clean anti-limescale handset and wall bracket
- Chrome plated to BS EN 248

Product Certifications:



WRAS Certificate No: 2107079 WRAS Expiry Date: 31/07/2026







For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

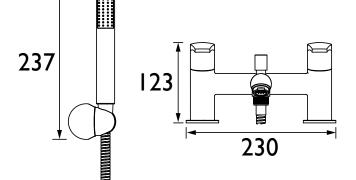



Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
Through Bath Filler (mixed)	18.4	29.1	41.2	58.2	71.3	92		
Through Handset (mixed)	5.2	8.2	11.6	16.4	20.1	25.9		

TECHNICAL DATA SHEET



