AQUALISA $eMOTION^{tM}$ **ELECTRIC SHOWER**

MIDNIGHT BLACK 8.5KW MOBC85 9.5KW MOBC95

10.5KW MOBC105

ARCTIC WHITE 8.5KW MOWC85

> MOWC95 9.5KW 10.5KW MOWC105

ELECTRIC 8.5KW / 9.5KW / 10.5KW WITH ADJUSTABLE HEAD

- MIDNIGHT BLACK / SPACE GREY / ARCTIC WHITE

- CHROME PLATED


SPACE GREY


8.5KW MOGC85


9.5KW MOGC95

10.5KW MOGC105

DIMENSIONAL DRAWINGS

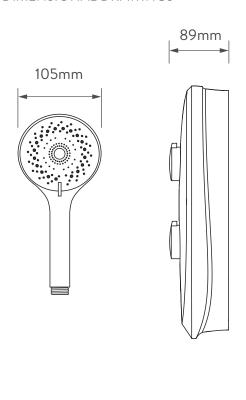


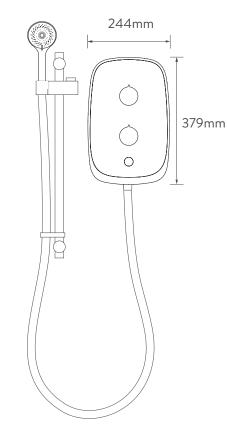

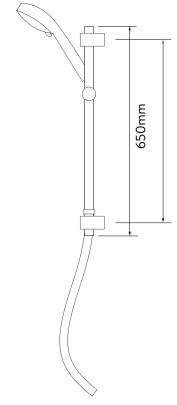

CONNECTIONS 5 ELECTRICAL





AQUALISA eMOTION™ ELECTRIC SHOWER

MIDNIGHT BLACK 8.5KW MOBC85

9.5KW MOBC95

10.5KW MOBC105

ARCTIC WHITE 8.5KW MOWC85

9.5KW MOWC95

10.5KW MOWC105

ELECTRIC 8.5KW / 9.5KW / 10.5KW WITH ADJUSTABLE HEAD

- MIDNIGHT BLACK / SPACE GREY / ARCTIC WHITE

- CHROME PLATED

SPACE GREY

8.5KW MOGC85

9.5KW MOGC95

10.5KW MOGC105

TECHNICAL SPECIFICATIONS

Power	8.5KW / 9.5KW / 10.5KW
Minimum pressure	0.085 MPa (0.85 bar) Recommended: 1 bar
Maximum pressure	1.0 MPa (10 bar)
Recommended maximum pressure	3 bar
Water entry points	Right hand side and left hand side: top, bottom, side and rear
Cable entry points	Right hand side and left hand side: top, bottom and rear
Inlet fitting connections	15mm compression or push fit elbow
Outlet fitting connections	1/2" BSP thread
Electric requirements	Supply voltage 230 – 240V, MCB rating : 8.5KW and 9.5KW - 40A 10.5KW - 45/50A
Water system	Mains cold system
Features	Digital temperature display
	Push button start/stop
	Rotary controls (power control rotary control)
	Safety features: Phased shut down, Over temperature protection
	Low pressure indicator
	Stainless steel hose
	105mm handset, 3 spray patterns (splash handset)
Colour	Midnight Black / Space Grey / Arctic White
Trim colour	Chrome Plated
Guarantee period	Shower unit – 2 years
	Shower head and kit – 2 years
Approvals	CE Marking
	BEAB
	European Water Label
	ERP Directive
	WRAS