CR SHXDIVFF C

CARRE Shower Range Carre Exposed Fixed Head Bar Shower with Diverter & Kit




Features:

- All in one box pack includes bar shower valve, hose, telescopic rigid riser rail and rub-clean anti-limescale drench head and multi function handset so nothing to buy separately
- Supplied with a fast fit Wallmount 12 fixing kit with built-in front of wall isolation valves on both the hot and cold feed, making it simple to fit, maintain and replace.
- Telescopic riser so you can adjust the height to suit your space. Giving you the flexibility to fit in a wet room/walk in shower or over a bath.

Product Certifications:				
Water Label	• 15.9l/min			
WRAS Certif) icate No: 2303902 / Date: 31/03/2028			
For more proc http://www.br	ducts, visit our website: <u>istan.com</u>			
则御				
	5			
TEC DAT	HNICAL			

Specification						
Finish/Colour:	Chrome Plated					
Main Construction Material:	Brass					
No of Controls:	2					
Shower Type:	Bar Shower					
Shower Head Type:	Both					
Shower Kit:	Telescopic Riser					
Valve/Cartridge Type:	Thermostatic					
Maximum Hot Water Supply Temperature ^o C:	65					
Plumbing System Suitability:	Suitable for all plumbing systems, ideally balanced					
Minimum Dynamic Pressure (bar):	0.5					
Maximum Dynamic Pressure (bar):	5					
Maximum Static Pressure (bar):	10					
Connection Inlet:	15mm Compression					
Connection Outlet:	G 1/2"					
Isolation Valve Included:	Yes					
Check Valve Included:	Yes					

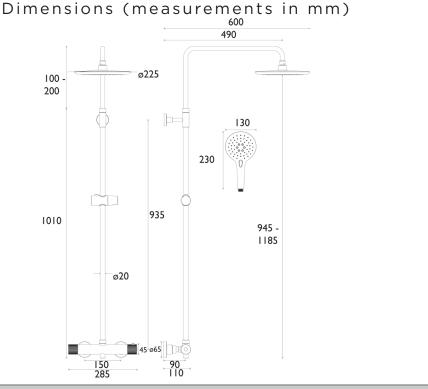

	Flow Rates (I/min)							
	System Pressure (bar)	0.5	1	2	3	4	5	
	Through Handset (mixed)	6.5	9.2	13	15.9	18.4	20.5	
	Through Fixed Head (mixed)	3.9	5.7	8.2	10	11.6	12.9	





BRISTA D17

Bristan, Birch Coppice Busir ness Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com * - Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.